



California Faucets®


Catalina™

WALL LAVATORY

CF-TO-V6302-7

Features

- 5-13/16" spout wall to center
- 1.2 gpm (4.5 L/min) max flow rate
- Rough valve (CF-VL-R) sold separately
- Solid brass construction
- Over 30 finishes including 15 PVD finishes


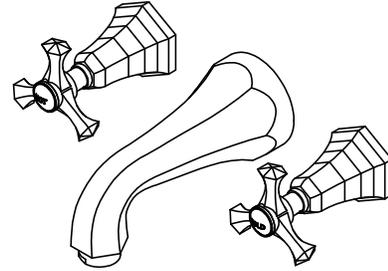


Codes/Standards Applicable

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF/ANSI 61 & NSF/ANSI 372
- CEC

THROUGH-HOLE SPECIFICATIONS		
MIN	RECOMMENDED	MAX
SPOUT: $\varnothing 1"$	$\varnothing 1-1/4"$	$\varnothing 2-7/16"$
VALVE: $\varnothing 1-1/4"$	$\varnothing 1-1/4"$	$\varnothing 1-5/8"$

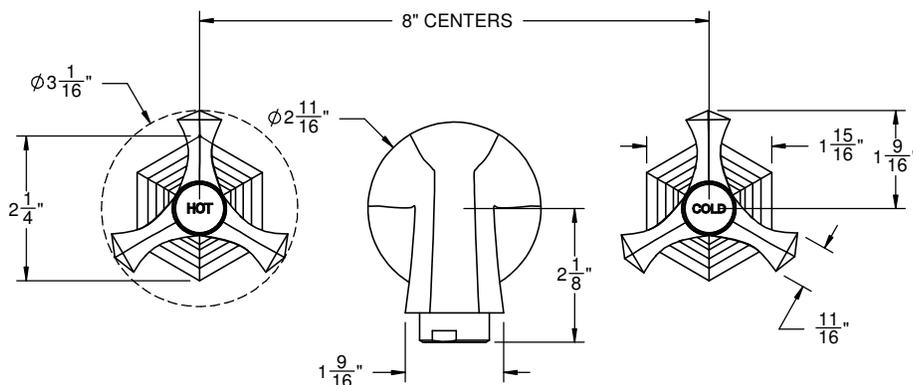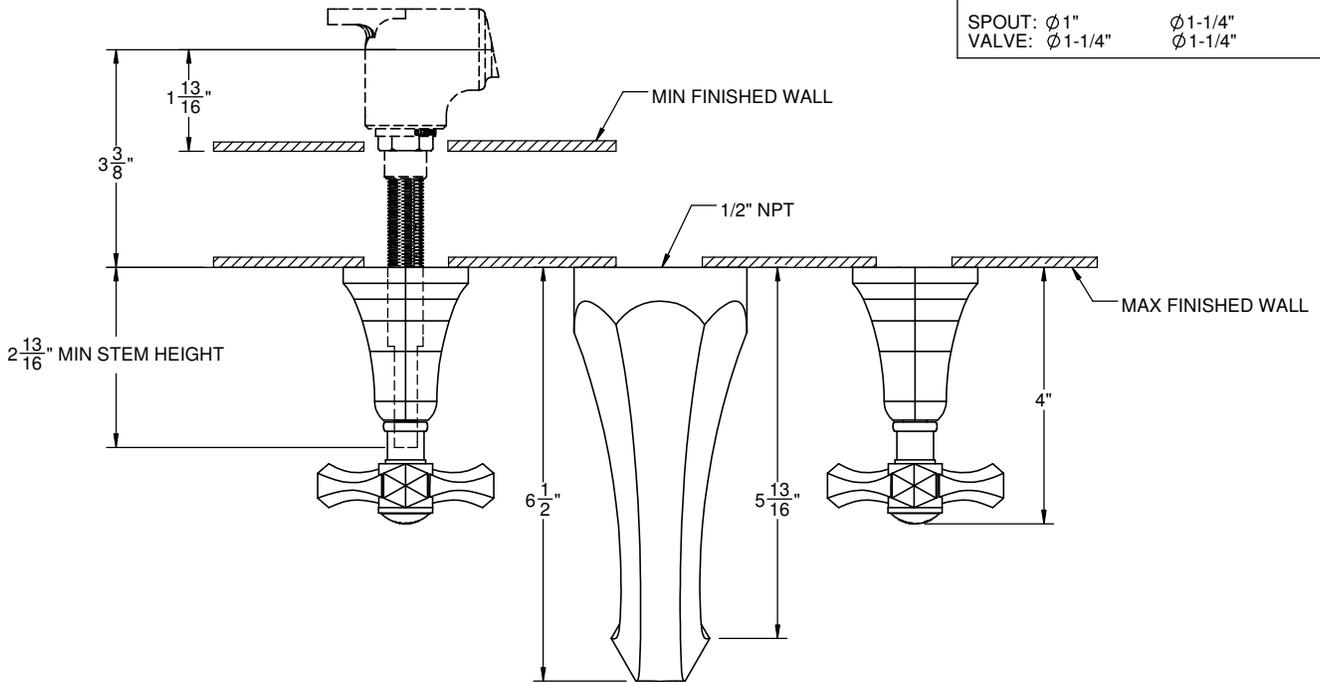

ALL DIMENSIONS SHOWN TO NEAREST 1/16"