



CF-TO-V7002-9


Features

- Over 30 finishes including 12 PVD finishes
- All brass construction
- 1/4 turn ceramic disc valves
- 8-1/2" spout reach
- Spout has quick-connect fitting for ease of installation
- 1.5 gpm (5.7 L/m) maximum flow rate (other flowrates available)
- Less drain
- Rough valve sold separately (CF-VL-R)
- See www.calfaucets.com for additional product offerings

Codes/Standards Applicable


Specified model meets or exceeds the following:

- ASME A112.18.1-2005/CSA B125.1-05
- NSF 61 and CA / VT lead plumbing law
- ADA (with lever handles)

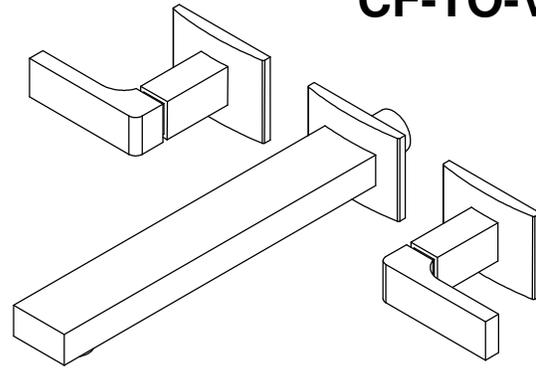

THROUGH-HOLE SPECIFICATIONS

SPOUT: \varnothing 1-1/4"
VALVE: \varnothing 1-1/4"

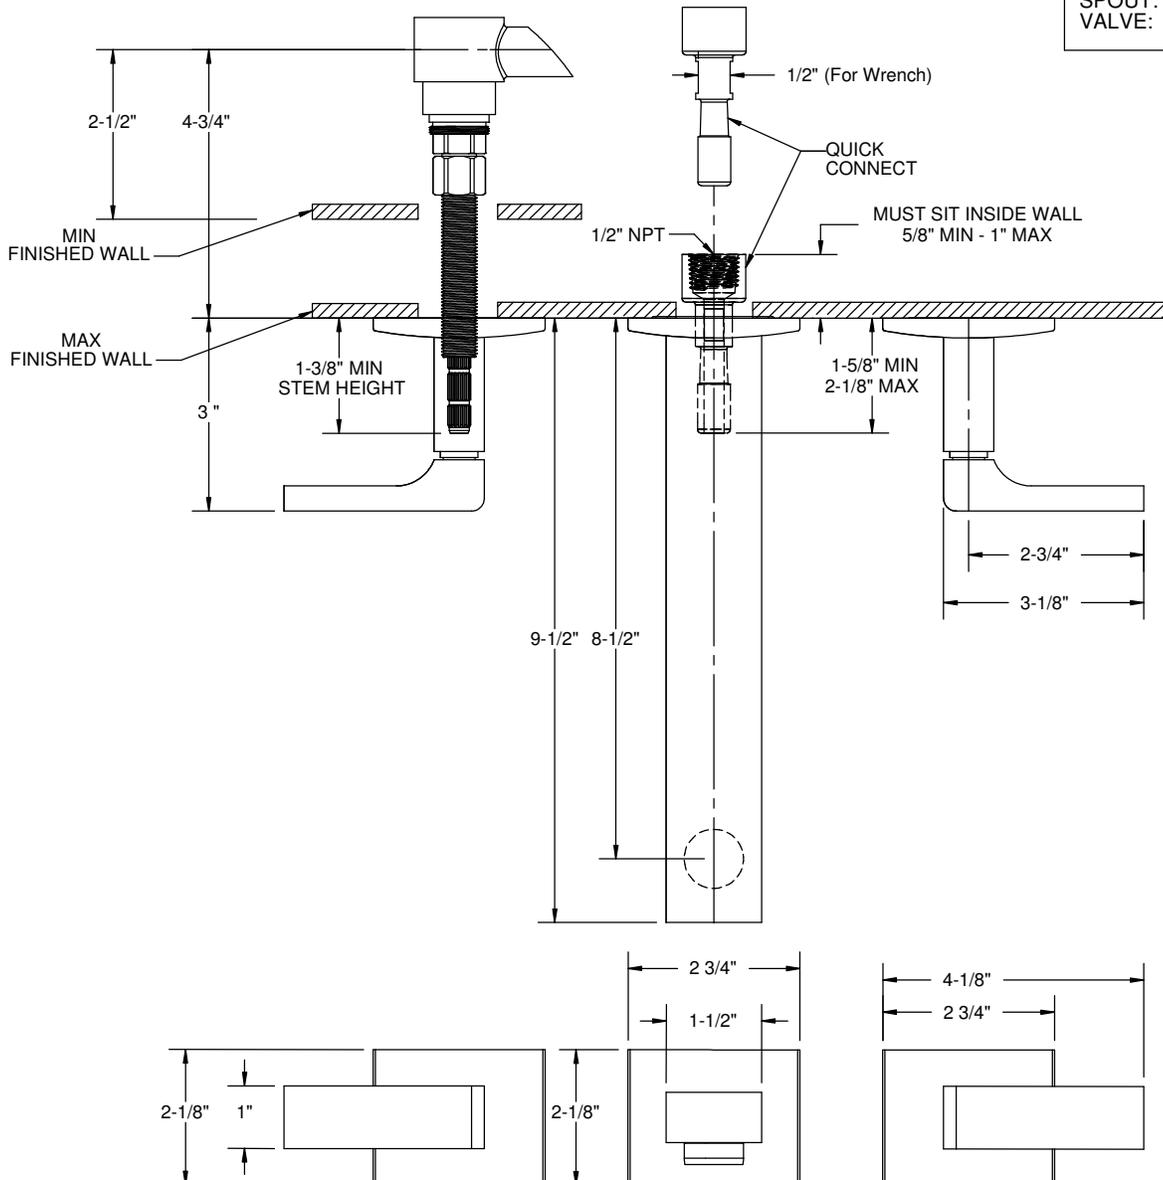

ALL DIMENSIONS SHOWN TO NEAREST 1/16"